


NOTES

1. PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS AS REQUIRED BY NATIONAL FIRE PROTECTION ASSOCIATION (NFFA) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
2. PROVIDE AND INSTALL GROUND FAULT CIRCUIT INTERRUPTERS (GFI) AS REQUIRED BY NATIONAL ELECTRIC CODE (NEC) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
3. UNLESS OTHERWISE INDICATED, INSTALL SWITCHES & RECEPTACLES AT THE FOLLOWING HEIGHTS ABOVE FINISH FLOOR:  
SWITCHES.....42"  
OUTLETS.....16"  
TELEPHONE.....16"  
TELEVISION.....16"
4. UNLESS OTHERWISE INDICATED, INSTALL VANITY LIGHTS FACE DOWN.
5. MOUNT SMOKE DETECTORS & CO DETECTORS ON WALL IF ATTIC SPACE IS ABOVE CLG. PROVIDE AND INSTALL AS REQUIRED BY NATIONAL ELECTRIC CODE (NEC) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
6. GARAGE DOOR SCONCE HEIGHTS ON THE SIDES OF THE GARAGE (CENTERED ON THE SPACE AVAILABLE)  
7' TALL DOOR: ROUGH IN AT +12" -8' TALL DOOR: ROUGH IN AT +18"  
FIXTURES OVER THE GARAGE DOOR - VERIFY WITH BUILDER IN THE FIELD  
HEADER SIZES, SOFFITS, FREEZE SPACE AVAILABLE ALL AFFECT WHAT CAN HAPPEN HERE.

ELECTRICAL KEY

- DUPLEX CONVENIENCE OUTLET  
DUPLEX OUTLET ABOVE COUNTER  
WEATHERPROOF DUPLEX OUTLET  
QUADPLEX OUTLET  
GROUND FAULT INTERRUPTER DUPLEX OUTLET  
HALF-SWITCHED DUPLEX OUTLET  
SPECIAL PURPOSE OUTLET  
DUPLEX OUTLET IN FLOOR  
220 VOLT OUTLET  
OUTLET ROUGH-IN  
WALL SWITCH  
THREE-WAY SWITCH  
FOUR-WAY SWITCH  
RHEOSTAT SWITCH  
CEILING MOUNTED INCANDESCENT LIGHT FIXTURE  
WALL MOUNTED INCANDESCENT LIGHT FIXTURE  
RECESSED INCANDESCENT LIGHT FIXTURE  
LIGHT FIXTURE WITH FULL CHAIN  
REINFORCED JUNCTION BOX  
TRACK LIGHT  
FLUORESCENT LIGHT FIXTURE  
EXHAUST FAN  
EXHAUST FAN/LIGHT COMBINATION  
OUTLET FOR GARAGE DOOR OPENER  
CHIMES  
PUSHBUTTON SWITCH  
SMOKE DETECTOR  
TELEPHONE  
TELEVISION  
THERMOSTAT  
ELECTRIC METER  
ELECTRIC PANEL  
DISCONNECT SWITCH  
SPEAKER  
ROUGH-IN FOR CEILING FAN  
CEILING MOUNTED INCANDESCENT LIGHT FIXTURE W/  
ROUGH-IN FOR CEILING FAN  
PENDANT LIGHT  
LED LOW PROFILE FLUSH MOUNT  
CAT6/COAX  
DIMMER SWITCH  
IRRIGATION CONTROL  
LOW VOLT TERMINATION

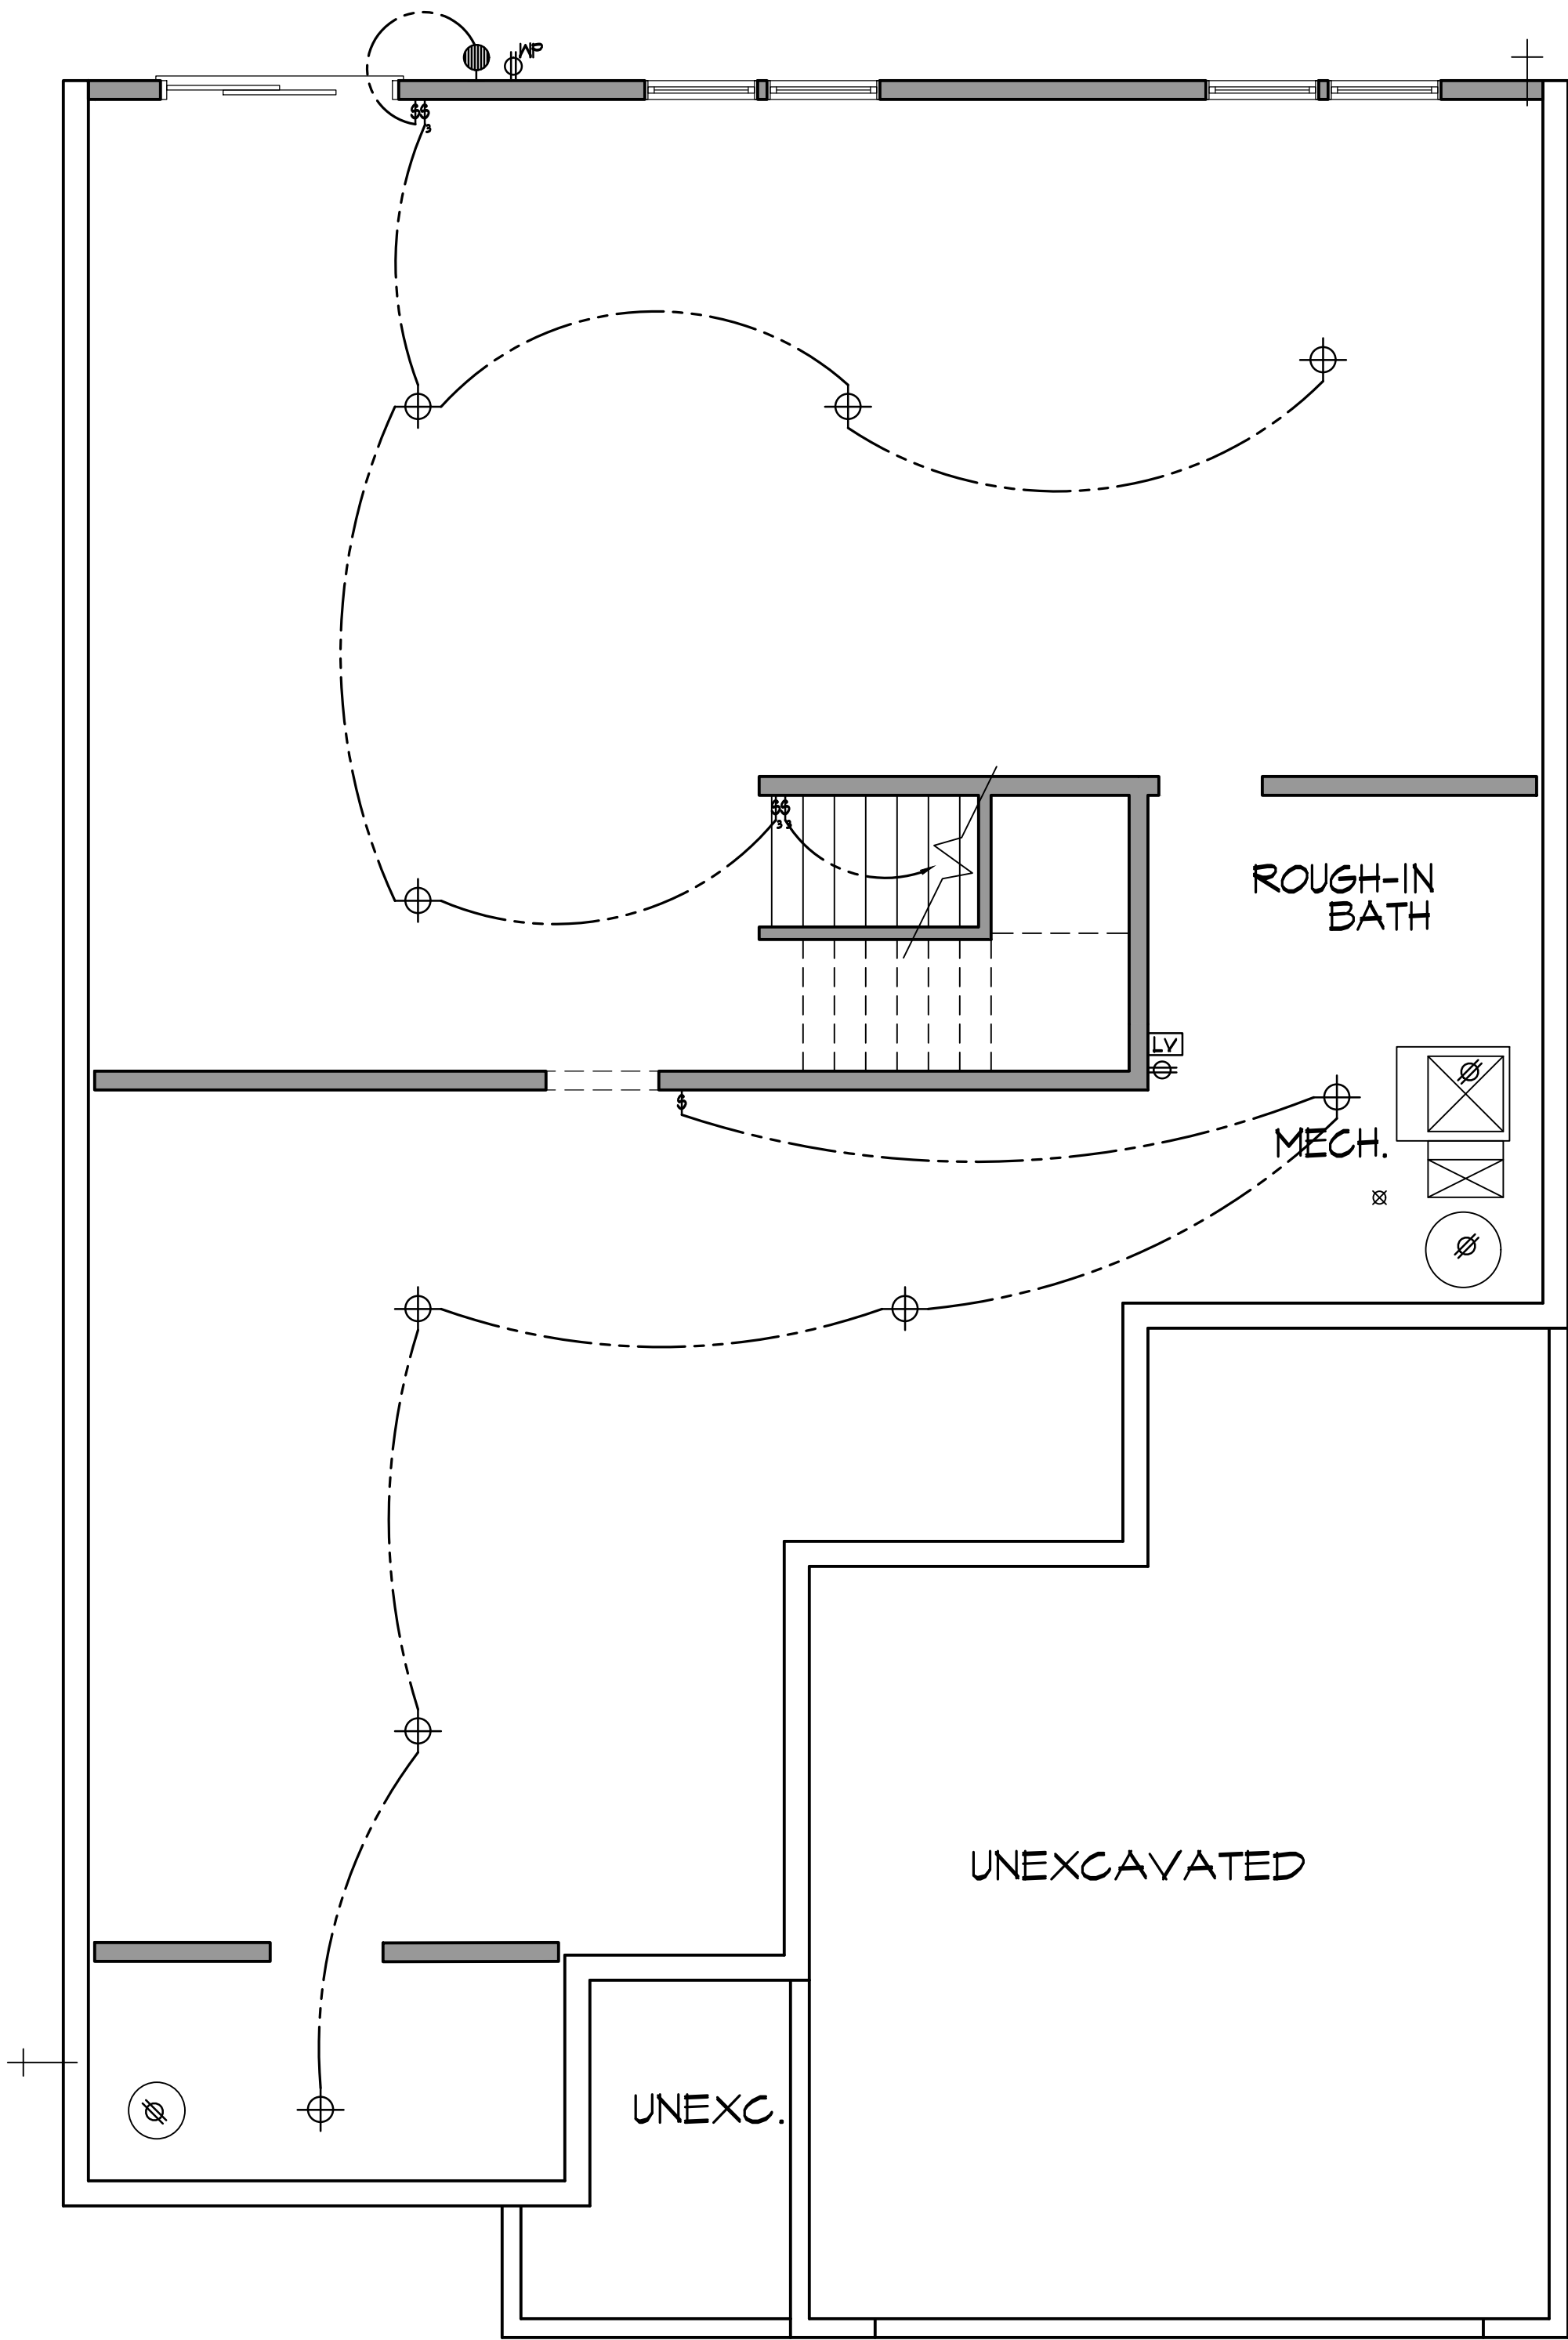

WALKOUT BASEMENT ELECTRICAL PLAN

1/4" = 1'-0"



707 COMMERCE DR. #410  
WOODBURY, MN 55125  
PH. 651-289-6800  
FX. 651-501-6600  
CREATIVEHOMES.COM

All designs and plans contained in these documents are the original work, owned and property of Creative Homes, Inc. Any reuse or reproduction of these documents in part or whole is strictly prohibited by law without prior written consent from Creative Homes, Inc. Notes and Dimensions are subject to change according to local building codes and site requirements. Consult state and local building regulations and/or Architect/Designer prior to construction related to these documents. Creative Homes, Inc. assumes no liability for changes made to these plans by others.

© Creative Homes, Inc. 2013

JOB INFORMATION

RILEY  
2024 BASE PLAN

SQUARE FOOTAGE CALC.		1811 SQ FT	1811 SQ FT	1811 SQ FT	1811 SQ FT	1811 SQ FT
MAIN LEVEL	1811 SQ FT	N/A	N/A	N/A	N/A	N/A
FIN. BASEMENT	N/A	N/A	N/A	N/A	N/A	N/A
TOTAL FINISHED	1811 SQ FT	1811 SQ FT	1811 SQ FT	1811 SQ FT	1811 SQ FT	1811 SQ FT
GARAGE	484 SQ FT	484 SQ FT	484 SQ FT	484 SQ FT	484 SQ FT	484 SQ FT
FRONT PORCH	54 SQ FT	54 SQ FT	54 SQ FT	54 SQ FT	54 SQ FT	54 SQ FT

REVISION LOG:	
ISSUED:	1-27-25
DRAWN BY:	MS
1) CONTRACT SET	INITIALS: X-X-XX
2) REVISION	INITIALS: X-X-XX
3) STRUCT. SIGN OFF	INITIALS: X-X-XX
4) SELECTIONS	INITIALS: X-X-XX
5) INTERNAL AUDIT	INITIALS: X-X-XX
6) INTERNAL PRECON	INITIALS: X-X-XX
7) HFBO	INITIALS: X-X-XX
8) REVISION	INITIALS: X-X-XX
9) REVISION	INITIALS: X-X-XX
10) REVISION	INITIALS: X-X-XX
11) REVISION	INITIALS: X-X-XX
12) REVISION	INITIALS: X-X-XX
13) REVISION	INITIALS: X-X-XX
13) REVISION	INITIALS: X-X-XX
14) REVISION	INITIALS: X-X-XX

PROJECT INFO:
PLAN NAME: RILEY
PROJECT NUMBER: 2024-XX
SHEET NUMBER: 50 OF 7